


# Dehumidifier

## DehuTech 400

Desiccant dehumidifier for drying of air at all conditions, but specially suitable for low temperature and low humidity operation.

Complete self-contained unit including desiccant rotor, fans, filters (EU3), thermistor-type reactivation heater, and controls. Casing in stainless steel.

The unit is ready for connection to standard size duct works, electrical power supply and external humidity sensor.

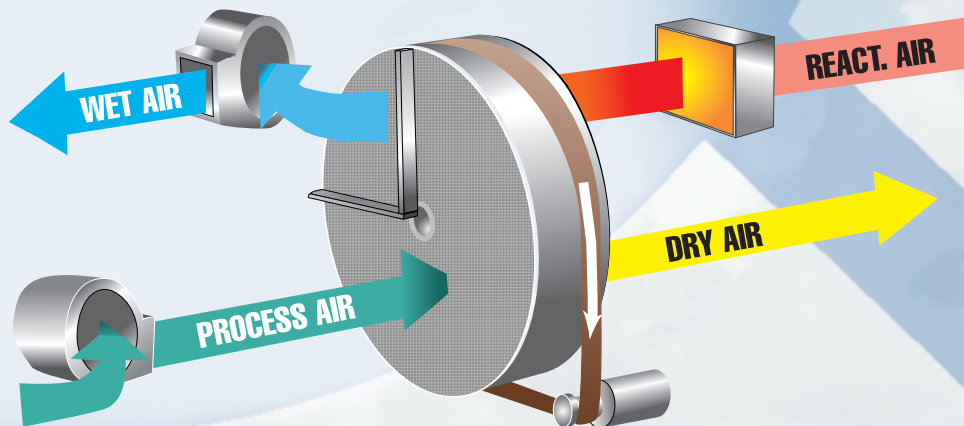


*technical data from*

**DehuTech**

# Dehumidifier DehuTech 400

## CAPACITY DIAGRAM

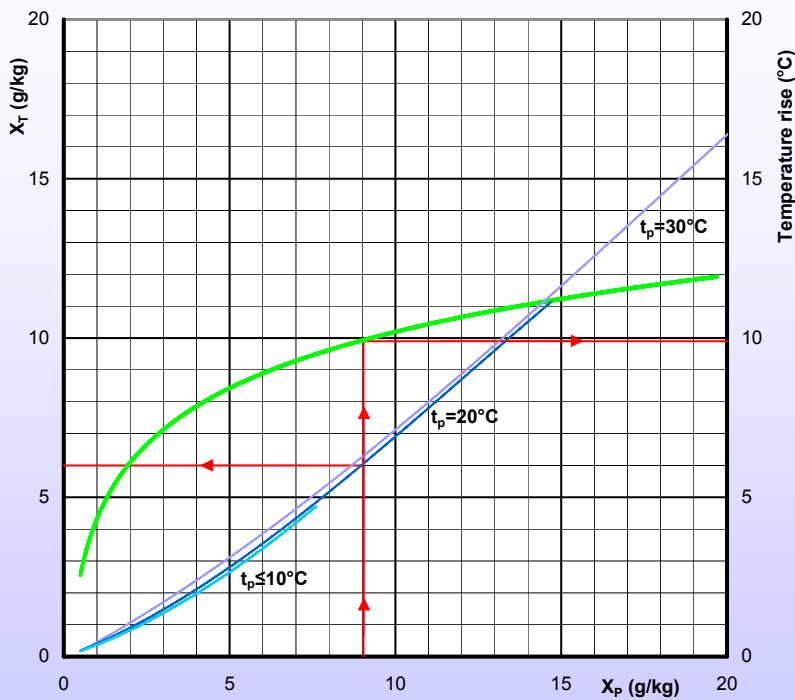

### EXAMPLE:

Process air:  $x_p = 9,0$  g/kg,  $t_p = +20^\circ\text{C}$  giving

Dry air:  $x_T = 6$  g/kg,  $t_T = 20+9,9 = 29,9^\circ\text{C}$

## TECHNICAL DATA:

Dehumidification capacity 1,5 kg/h  
(at  $+20^\circ\text{C}$  and 60% RH.  
See capacity diagram for other data)

Dry air flow 400 m<sup>3</sup>/h  
(at 30 Pa available external pressure)


Wet air flow (freeblowing) 120 m<sup>3</sup>/h

Power supply 2,3 kW  
(1x230 V, 50 Hz)

Weight 23 kg

Max noise level 62,2 dB(A)

## DIMENSIONS

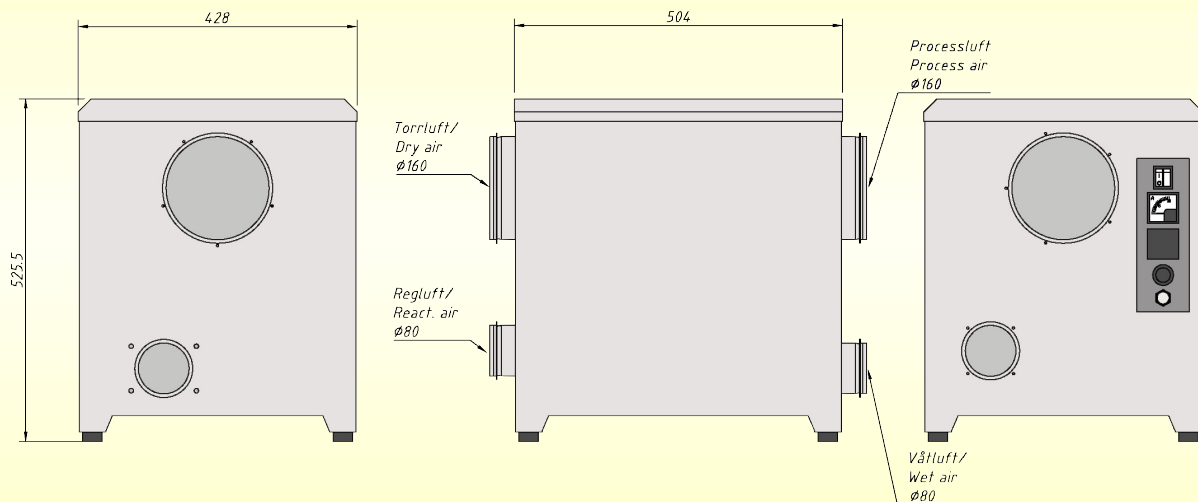

Manufacturer:



Enhagsslingan 23, S-18740 TÄBY, Sweden

Phone +46 8 792 04 08 Fax +46 8 792 55 59

E-mail: [info@dehutech.com](mailto:info@dehutech.com) Web site: [www.dehutech.com](http://www.dehutech.com)